


A B E A U T I F U L

*Thinking*



LATIGRES


TILES STUDIO



**DOUBLE  
CHARGE**  
VITRIFIED TILES

**600X  
600MM**



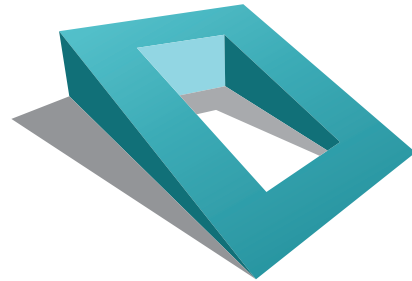

LATIGRES

TILES STUDIO



**DOUBLE  
CHARGE**  
VITRIFIED TILES

**600X  
600MM**

**GLAM-  
OROUS**






REMARKABLE  
*Influence*

Bloom up your spaces with our exclusive tiles collection. Radiant and vibrant to lift up your spirits.



**DOUBLE  
CHARGE**  
VITRIFIED TILES

**600X  
600MM**

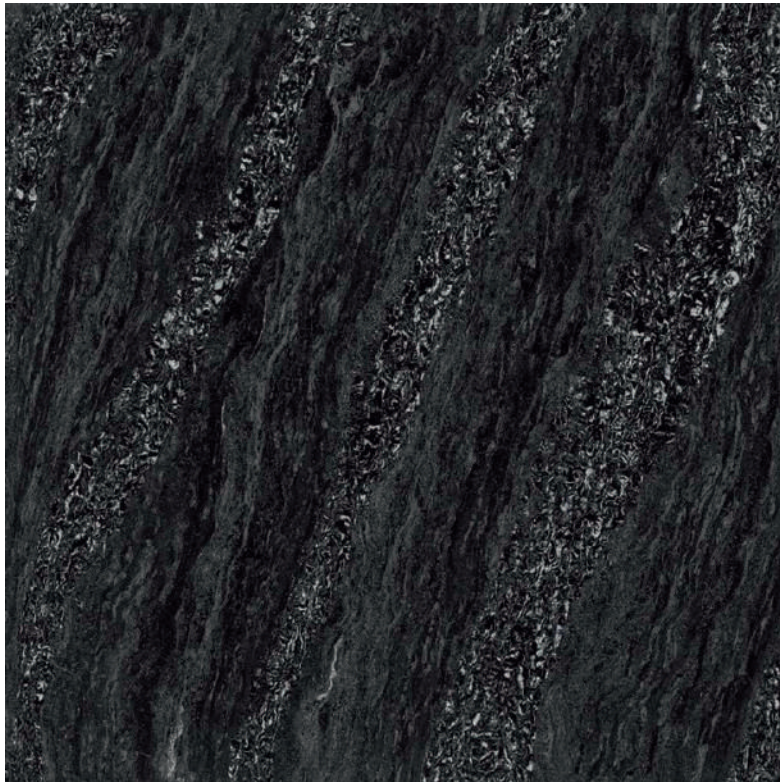

**AZA BLACK**



**LATIGRES**  
TILES STUDIO



- DOUBLE LAYER
- HIGH GLOSSINESS
- INTERIOR APPLICATION
- HIGH GLOSS NANO TECHNOLOGY
- CHEMICAL RESISTANCE
- LOW WATER ABSORPTION



CM/L.No. 7900104818





**DOUBLE  
CHARGE**  
VITRIFIED TILES

**600X  
600MM**



**CRYSTAL BLACK**



**LATIGRES**  
TILES STUDIO



- DOUBLE LAYER
- HIGH GLOSSINESS
- INTERIOR APPLICATION
- HIGH GLOSS NANO TECHNOLOGY
- CHEMICAL RESISTANCE
- LOW WATER ABSORPTION



IS15622



CM/L.No. 7900104818







**DOUBLE  
CHARGE**  
VITRIFIED TILES

**600X  
600MM**



**CRYSTAL RED**



**LATIGRES**  
TILES STUDIO



- DOUBLE LAYER
- HIGH GLOSSINESS
- INTERIOR APPLICATION
- HIGH GLOSS NANO TECHNOLOGY
- CHEMICAL RESISTANCE
- LOW WATER ABSORPTION



IS15622




CM/L.No. 7900104818





**DOUBLE  
CHARGE**  
VITRIFIED TILES

**600X  
600MM**

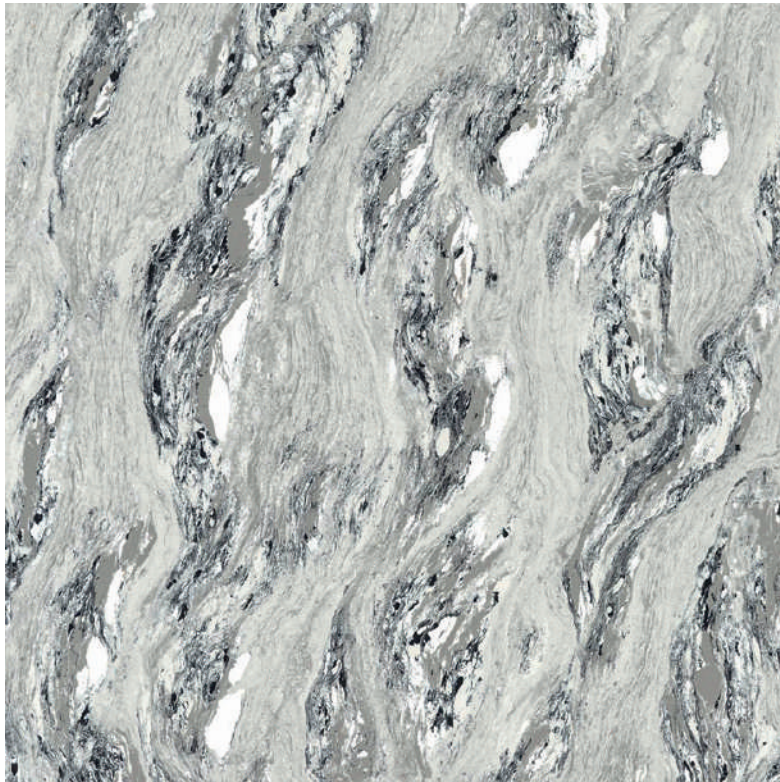

**CRYSTAL GREY**



**LATIGRES**  
TILES STUDIO



- DOUBLE LAYER
- HIGH GLOSSINESS
- INTERIOR APPLICATION
- HIGH GLOSS NANO TECHNOLOGY
- CHEMICAL RESISTANCE
- LOW WATER ABSORPTION



IS15622



CM/L.No. 7900104818






**DOUBLE  
CHARGE**  
VITRIFIED TILES

**600X  
600MM**

# ICEBERG BLACK



**LATIGRES**  
TILES STUDIO

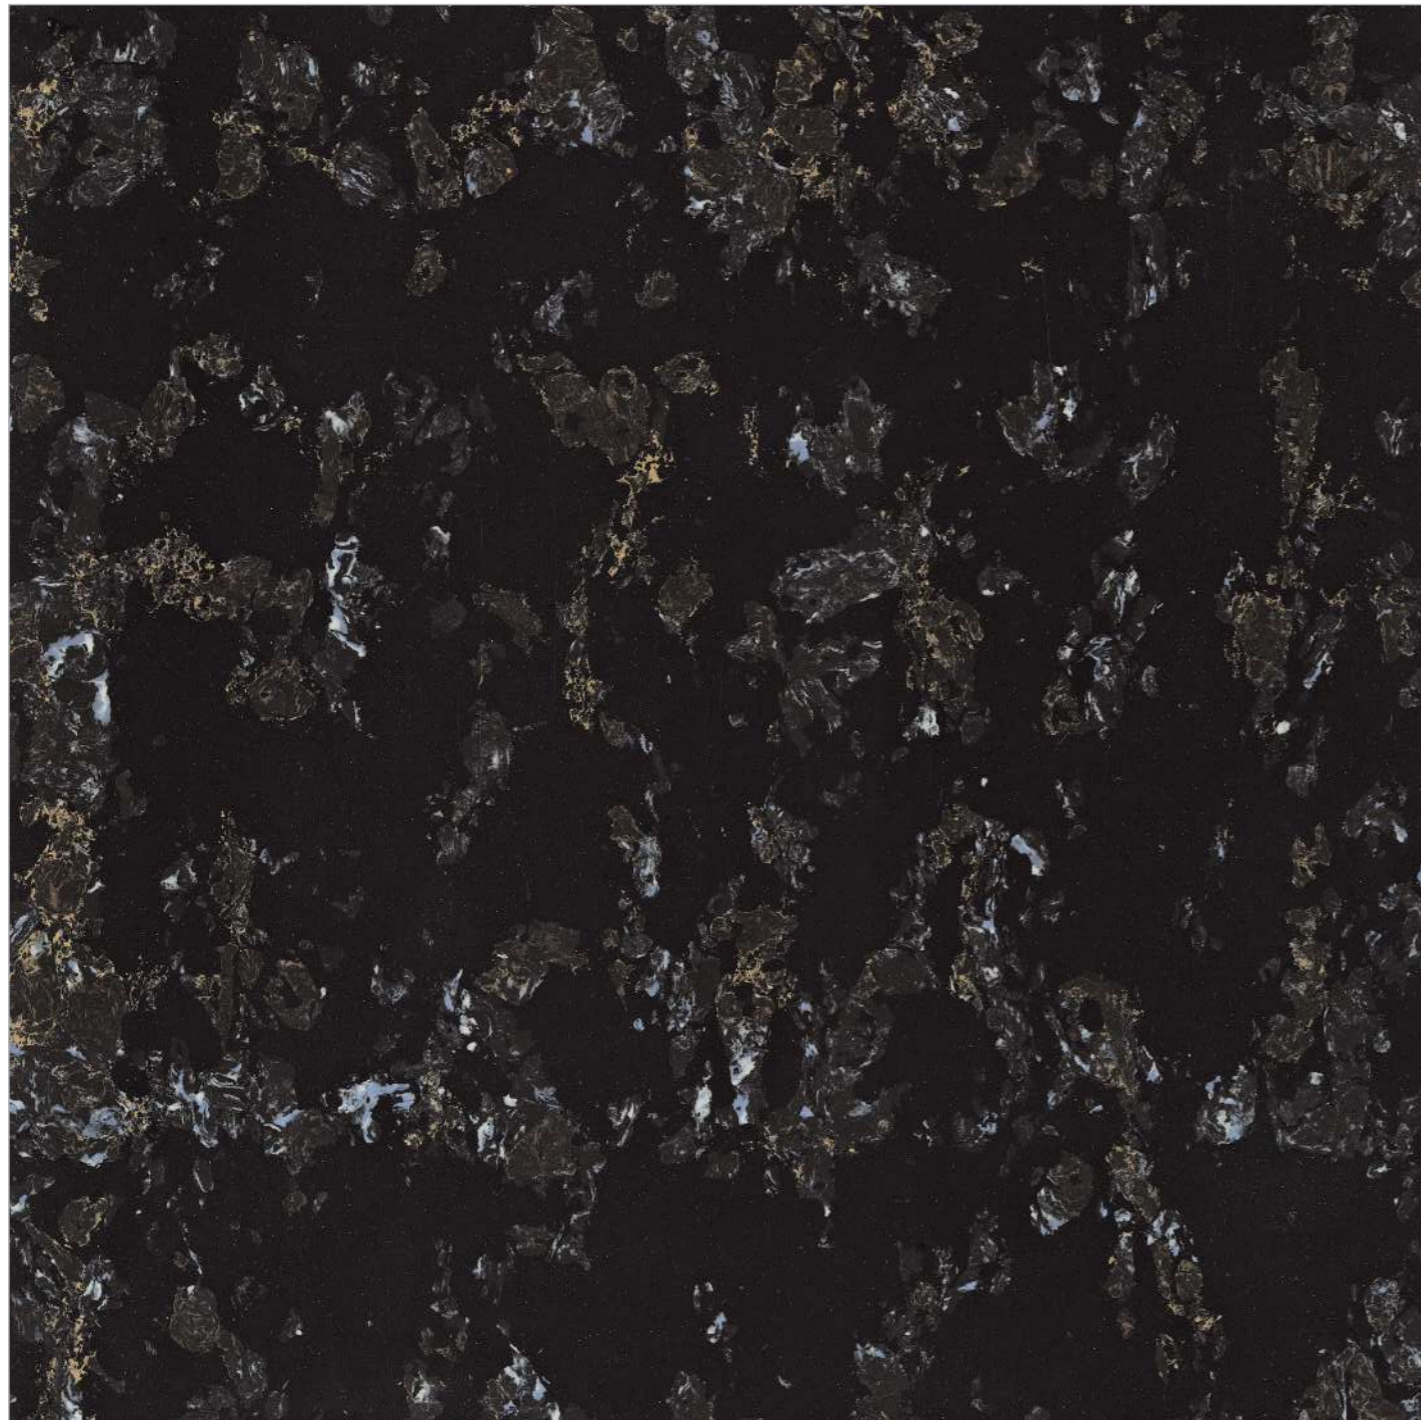

- DOUBLE LAYER
- HIGH GLOSSINESS
- INTERIOR APPLICATION
- HIGH GLOSS NANO TECHNOLOGY
- CHEMICAL RESISTANCE
- LOW WATER ABSORPTION




IS15622



CM/L No. 7900104818



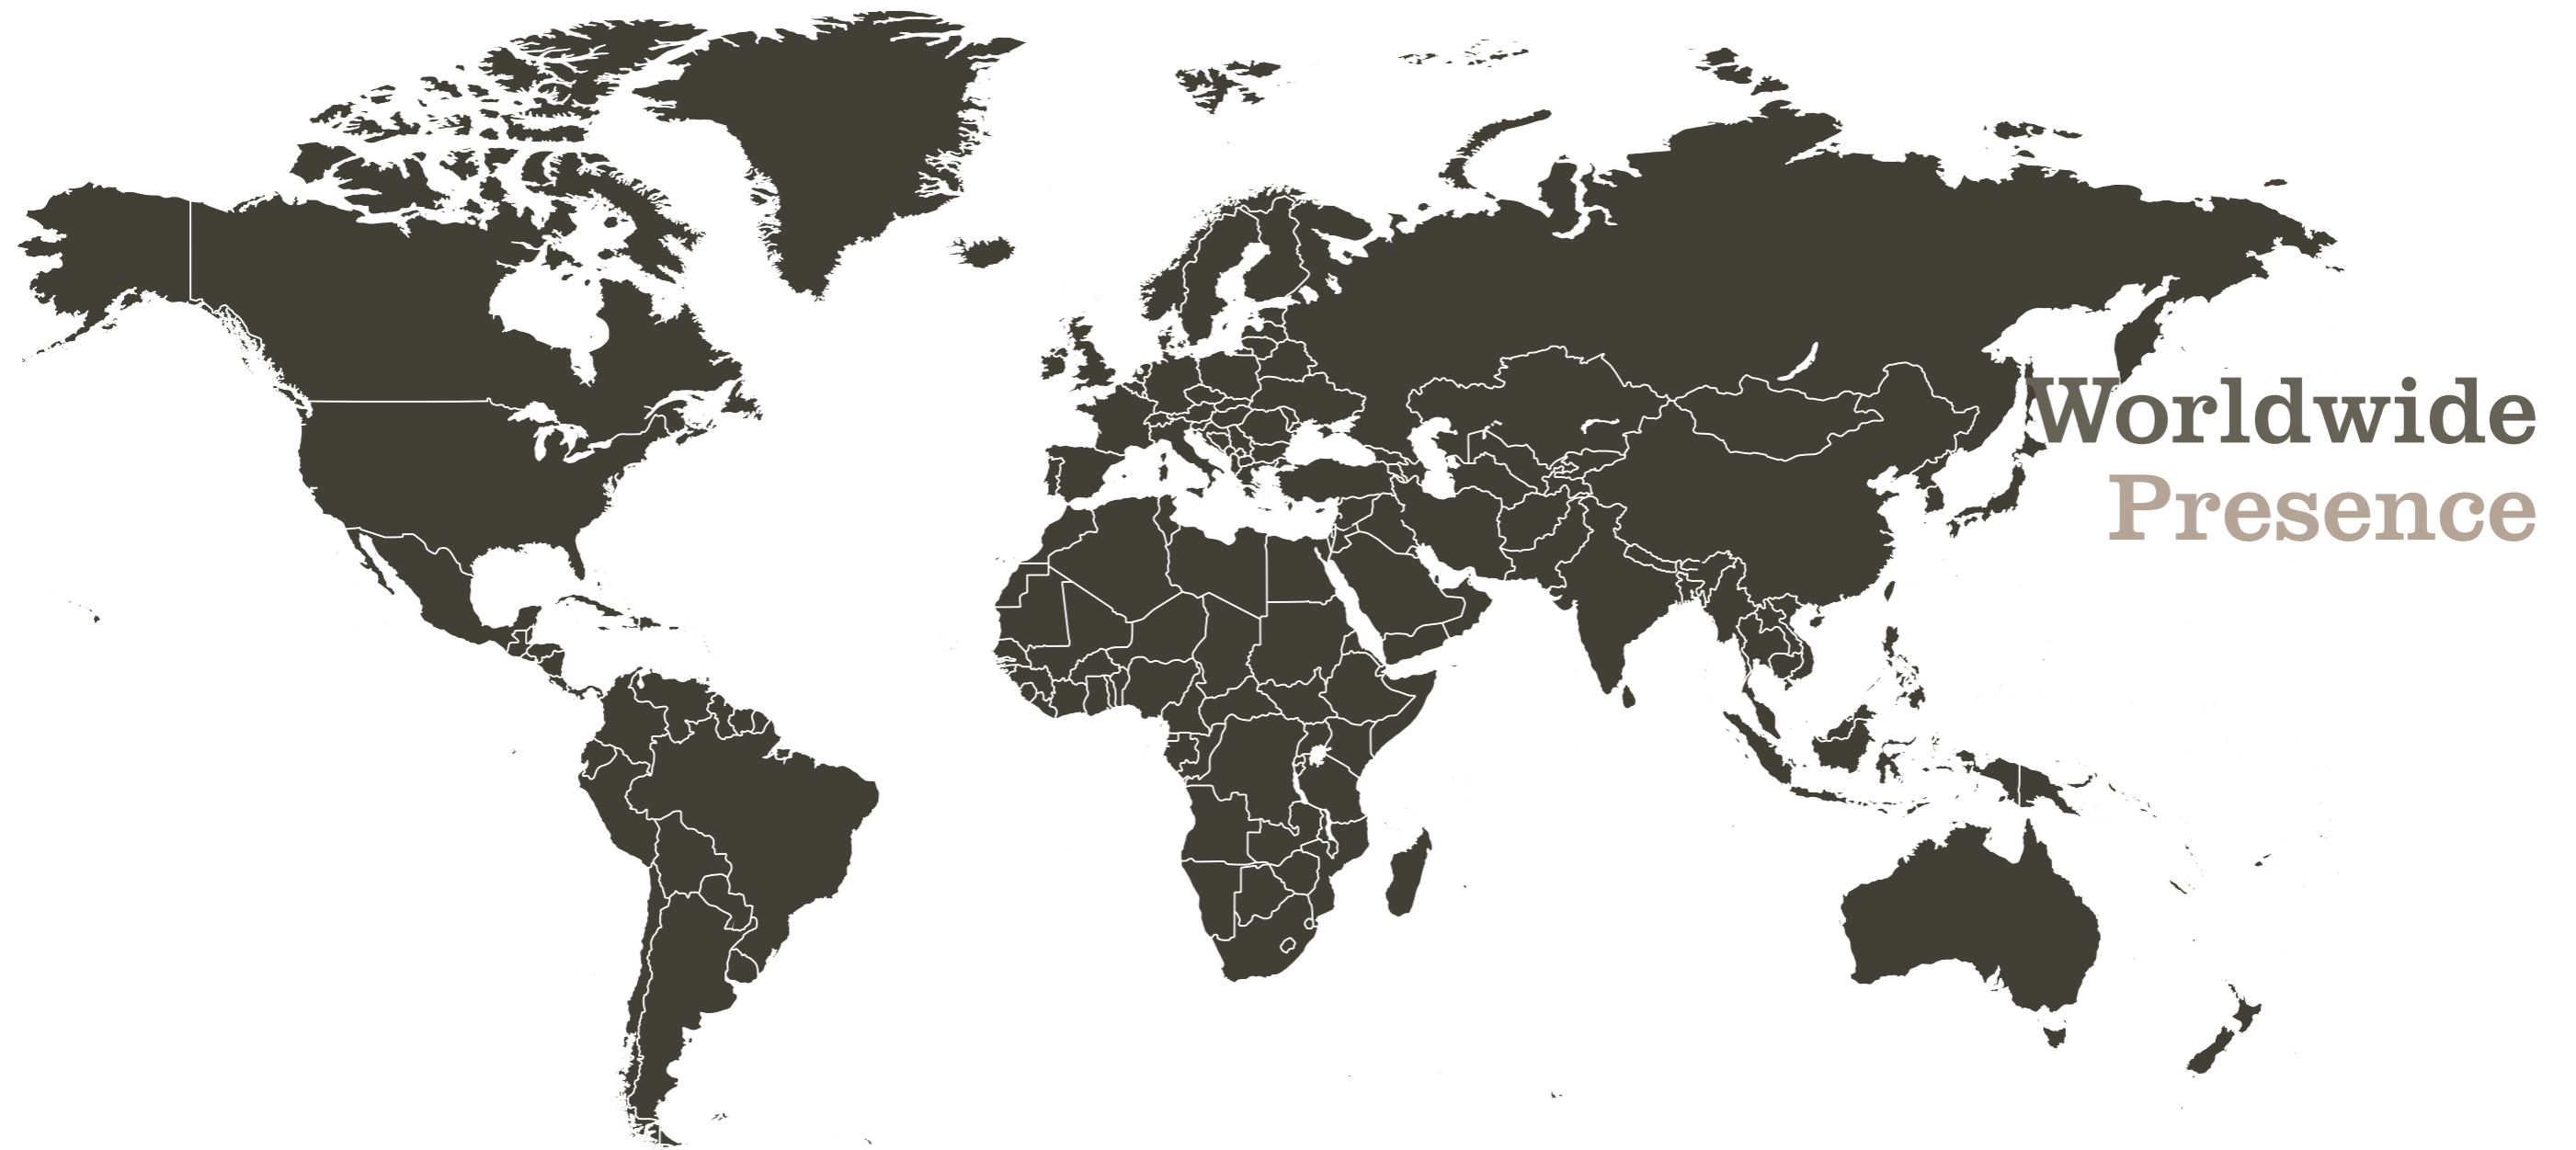

[www.latigres.in](http://www.latigres.in)


## PACKING DETAILS

Size	Thickness (Approx)	Pieces/Box	coverage Area / Box (Approx)		Weight / Box (Approx)
600x600mm	8 mm	4 pcs.	1.44 Sq. Mtr.	15.5 Sq. Ft.	25 Kgs.

## TECHNICAL SPECIFICATIONS

CHARACTERISTICS	STANDARD AS PER ISO-13006/EN 14411 GROUP BIA	MEAN VALUE OF LATIGRES DC	TEST METHOD
<b>REGULATORY PROPERTIES</b>			
Deviation in length & width	± 0.5%	± 0.1%	ISO-10545-2
Deviation in thickness	± 5.0%	± 4.0%	ISO-10545-2
Straightness of sides	± 0.5%	± 0.1%	ISO-10545-2
Rectangularity	± 0.5%	± 0.1%	ISO-10545-2
Surface flatness	± 0.5%	± 0.2%	ISO-10545-2
Colour difference	Unaltered	No Change	ISO-10545-16
Glossiness	As per mfg.	Min. 90%	GLOSSOMETER
<b>STRUCTURAL MECHANICAL PROPERTIES</b>			
Water Absorption	< 0.50%	< 0.20 %	ISO-10545-3
Apparent density	> 2.0 g/cc	> 2.10 g/cc	DIN 51082
<b>MASSIVE MECHANICAL PROPERTIES</b>			
Modulus rupture	Min 35 N/mm <sup>2</sup>	Min 40 N/mm <sup>2</sup>	ISO-10545-3
Breaking Strenght	Min.1300 N	min.1500 N	ISO-10545-4
Impact resistance	As per mfg.	Min. 0.55	ISO-10545-5
<b>SURFACE MECHANICAL PROPERTIES</b>			
Surface abrasion resistance	As per mfg.	Min Class 3	ISO-10545-7
MOH's hardness	As per mfg.	Min 4	EN 101
<b>THERMOHYDROMETRIC PROPERTIES</b>			
Frost resistance	No Damage	No Damage	ISO-10545-12
Thermal shock resistance	No Damage	No Damage	ISO-10545-9
Moisture expansion	Nil	Nil	ISO-10545-10
Thermal expansion (CEO)	Max.9.0x10 <sup>-6</sup>	Max.6.5x10 <sup>-6</sup>	ISO-10545-8
Crazing resistance	As per mfg.	Min 10 Cycle	ISO-10545-11
<b>CHEMICAL PROPERTIES</b>			
Chemical resistance	No Damage	No Damage	ISO-10545-13
Satin resistance	Resistance	Resistance	ISO-10545-14
<b>SAFETY PROPERTIES</b>			
Slip resistance	As per mfg.	> 0.40	ISO-10545-17
Fire resistance	As per mfg.	Fire Proof	N.A.
Lead & Cadmium given off by glazed tiles	As per mfg.	Doesn't yield Pb & Cd	ISO-10545-15





LATIGRES  
TILES STUDIO

8-A, National Highway, Behind Lalpar 132 K.V. Power House,  
At. Jambudiya, Morbi - 363 642 (Guj.) INDIA

**Call.**

+91 7069066613

**Mai.**

care@latigres.in

**Web.**

www.latigres.in